

## Safety Precautions and Warnings

RC helicopter is controlled by radio signals. It may be interfered by other radio signals during operation. These interference may cause the helicopter lose control.

### Warning


1. Improper operation to Esky 150X may lead to damage or loss. It is prohibited for children under 14 years to operate this product.
2. Keep it away from high temperature environment for storage and flight.
3. Suggested operation temperature: 5-35°C; Humidity: 20-80%
4. Keep away from fan, air conditioner, table light while flying.
5. Do not contact the motor in case of damage or injury.

### Prohibition

1. Keep away from crowds in case of accidents.
2. Do not operate Esky150X in shower room or under rain. Moisture may go inside the helicopter which may cause electronic parts malfunction and unexpected incident.
3. Do not re-equip, upgrade or repair your helicopter with unauthorized parts.
4. Keep people and objects away from the spinning unit and parts in case of damage or injury.

## Helicopter Parts

Diagram A

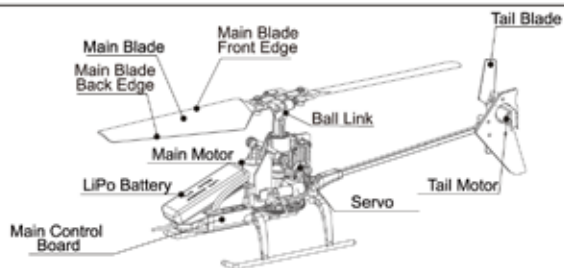

## Flight Operation Procedure

### 1. Preflight Procedure

- 1) Set the **Throttle Stick [Right Stick (Mode1)/Left Stick (Mode2)]** down to bottom and power on the transmitter.
- 2) Put the helicopter on the ground or flat, power on the helicopter, make sure the helicopter remains flat until the helicopter passes the self-testing. (Condition: Blue LED light from quick flashing to slow flashing in the indicator)
- 3) Safety Unlock:

#### Mode1

Keep the **Right Stick** down to bottom, then pushing the **Left Stick** to Right for at least 3 seconds and release. (Condition: blue LED light from slow flashing to quick flashing in the indicator.)

- 4) Take Off: Please take off in 10 seconds, if not, Helicopter will automatically lock.  
Unlock the helicopter by step 3.

#### Mode2

Keep the **Left Stick** down to bottom, then pushing the **Left Stick** to Right Bottom Corner for at least 3 seconds and release. (Condition: blue LED light from slow flashing to quick flashing in the indicator.)

### 2. End Flight Procedure

- 1) Power Off the Helicopter
- 2) Power off the Transmitter

Left Hand Throttle




Right Hand Throttle



## 1. Transmitter

Left Hand Throttle  
(Mode 2)


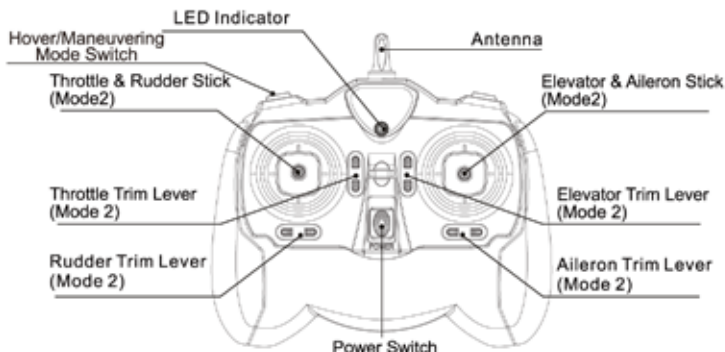


P.S. Hover Mode (Press Hover/Maneuvering Mode Switch, "Beep" that Hover Mode).


Maneuvering Mode (Press Hover/Maneuvering Mode Switch, "Beep""Beep" that Maneuvering Mode).

Hover Mode defaulted when turn on the transmitter, it was recommended to landing when switch mode.

## 2. Transmitter Control - Mode 2

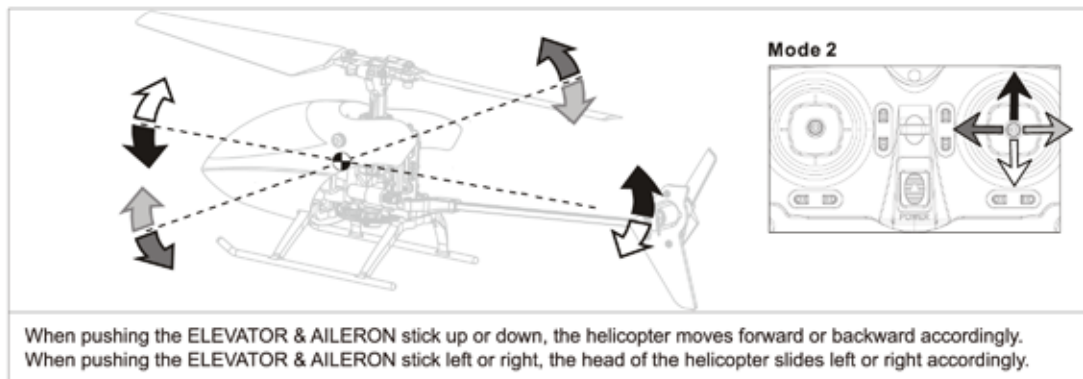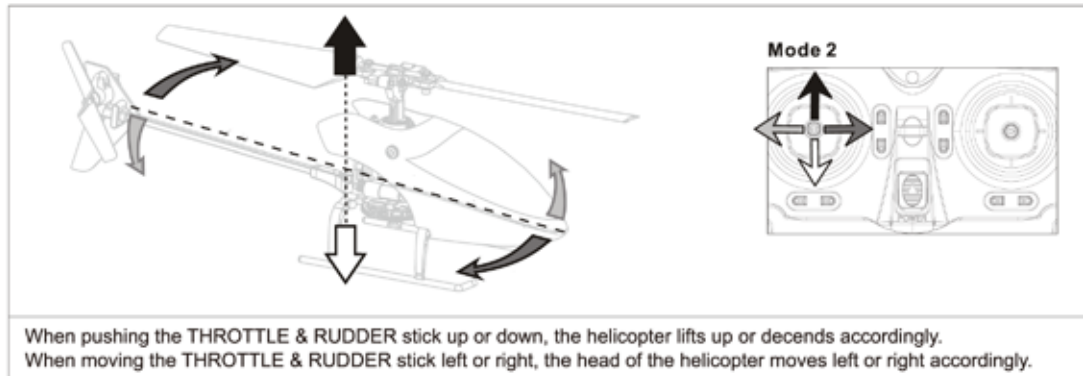

## 3. Transmitter


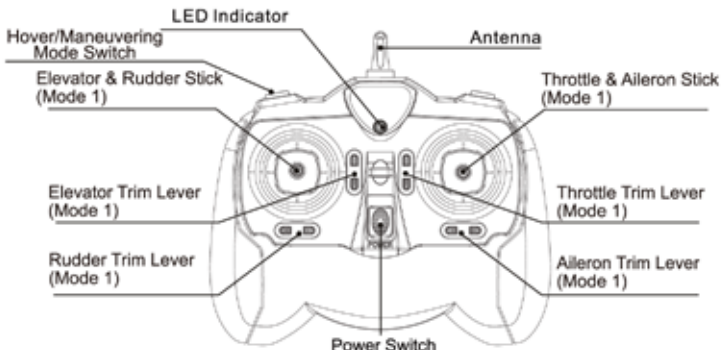
Right Hand Throttle  
(Mode 1)

P.S. Hover Mode (Press Hover/Maneuvering Mode Switch, "Beep" that Hover Mode).

Maneuvering Mode (Press Hover/Maneuvering Mode Switch, "Beep""Beep" that Maneuvering Mode).



Hover Mode defaulted when turn on the transmitter, it was recommended to landing when switch mode.

## 4. Transmitter Control - Mode 1

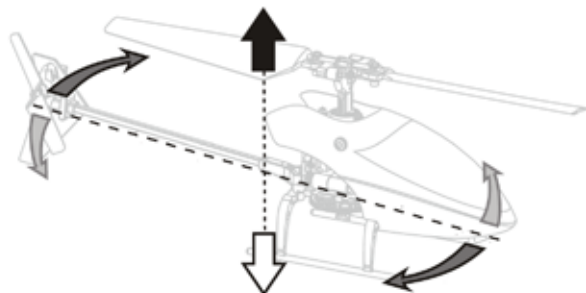

When pushing the THROTTLE &amp; AILERON stick up or down, the helicopter lifts up or descends accordingly.


When moving the ELEVATOR &amp; RUDDER stick left or right, the head of the helicopter moves left or right accordingly.

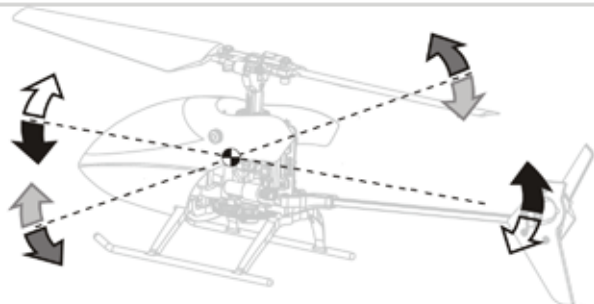

When pushing the ELEVATOR &amp; RUDDER stick up or down, the helicopter moves forward or backward accordingly.

When pushing the THROTTLE &amp; AILERON stick left or right, the head of the helicopter slides left or right accordingly.

- 1) Switch off transmitter, switch on helicopter, the condition green LED from helicopter flashes rapidly.
- 2) Press the right button of the rudder trim lever from the transmitter and switch on the transmitter.
- 3) When the condition LED from helicopter is extinguished, release the right button until the helicopter's condition green LED relights which implies the binding is completed. (Helicopter was completely binded in the factory setting.)

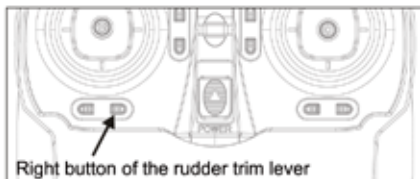

## Command Problems FAQ

Situation	Reason	Solution
Why the battery bulge before second flight?	Over discharge the battery	Replace a new battery
Why the helicopter not stable when flight?	Due to some parts fixed error	Adjust by trim lever
Why the helicopter green light being slow flash?	LiPo battery low voltage protection	LiPo battery low voltage protection
Why the green light so not solid on the helicopter?	Do not receive any signal	Do not receive any signal
How do I know when a battery is 100% charged?	When the charger light charge from red to green	When the charger light charge from red to green
What is the function of the Dual Rate Button?	To switch the flight mode and sensitive between Tx and Helicopter	
Blades overlapping	Blade deformed	Refer to main blade adjustment
Heavily skewed when flight	Linking parts separated	Check each linking parts
Heavily unstable when flight	Sensor swot analysis mistakes	Reboot the helicopter


P.S. The development of the ESKY 150X would not have been possible without the effort of a large team of individuals who invested in the open source flight controller software that running on the ESKY 150X.

## Main Blade Adjustment

If the helicopter blades overlapping, adjust it as below:

- Yellow at the Top:** Adjust ball link of main blade front edge (Diagram A in P.1) clockwise rotate one time and adjust ball link of main blade back edge counterclockwise rotate one time. until the problem solved.
- Yellow at the Bottom:** Adjust ball link of main blade front edge (Diagram A in P.1) counterclockwise rotate one time and adjust ball link of main blade back edge clockwise rotate one time until the problem solved

## Spare Parts



ESKY006310  
Main Rotor Blade Grip Set




ESKY006404  
Swashplate Set



ESKY006311  
Main Gear



ESKY006406  
Ball Link



ESKY006407  
Servo Set




ESKY006408  
Rotor Housing Set



ESKY005439  
Bearing: 3\*6\*2



ESKY005805  
Bearing 5\*8\*2



ESKY005435  
LiPo Battery




ESKY006007  
USB Charger



ESKY005437  
Transmitter (Mode 2)



ESKY005437a  
Transmitter (Mode 1)



ESKY006316  
Screws Set



ESKY006405  
Pshrod Set



ESKY006403  
150X Tail Blade




ESKY006317  
Canopy



ESKY006318  
Main Frame




ESKY006319  
Tail Motor (w/ mount)




ESKY006320  
Landing Skid Set




ESKY006314  
Main Flight Control



ESKY006402  
Main Blade




ESKY006313  
Main Motor



ESKY007024  
Double-sided Stickers

## Charging the LiPo Battery by USB Charger

- 1) Plug the 3.7v LiPo Battery into the USB charger
- 2) Plug the USB charger into the USB port of computer or charger. Then there is a solid red light on the USB charger's LED indicator.
- 3) When the LiPo Battery is fully charged, the red light will change to green light.

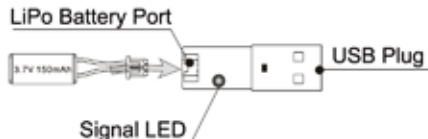

Global Distribution Office:

Zonda Hobby Technologies Electronic Limited

Room 404, 4/F, Bldg A, Hoplite Industrial Centre, No. 3-5 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong

Tel: (852)31608886 Fax: (852)31608884

Official Website: [www.zondahobby.com](http://www.zondahobby.com) / [www.zondahobby.com.cn](http://www.zondahobby.com.cn)